


252 COASTAL

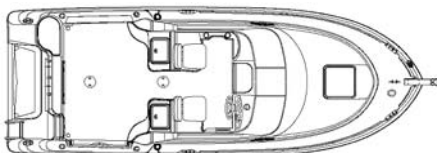

L.O.A.	24' 4" (7.42 m)
Beam	8' 9" (2.66 m)
Dry weight (approx.)*	4360 lbs. (1978 kg)
Fuel capacity (Gas)	140 gal. (530 L)
Water capacity	9 gal. (34 L)
Max power @ prop	300 HP (224 kw)
Shaft length single	30" (.76 m)
Shaft length twin	25" (.64 m)
Dead rise	20°
Draft: up (approx.)	16" (.40 m)
Draft: down (approx.)	29.5" (.75 m)
Bridge clearance w/o top (approx.)	6' (1.83 m)
Bridge clearance w/bimini top (approx.)	8' (2.43 m)
Bridge clearance w/hardtop (approx.)	8' 2" (2.49 m)

* Dry weights are calculated with standard equipment only and do not include engine(s). Dry weight will vary with engine and options installed.

KEY SALES FEATURES

- Full height transom • Foam-filled, fiberglass, box section stringer with integral high density composite transom
- Full fiberglass cabin liner with molded soft touch headliner
 - Fishbox portside 128 qt. w/overboard drain • Integrated cooler - stbd side - 44 qt. w/overboard drain
- Kodiak Pro Flow, lighted baitwell 116 qt. with sealed, clear bait lid, positive latching cover and overboard drain
- Dry storage (92 qt) under helm seat with room for safety gear • Rod storage under gunwale port and starboard
 - Stainless steel gunwale - mounted rod holders (4)
- Fiberglass cockpit with diamond pattern skid resistant surfaces • All stainless steel deck hardware thru-bolted • Complies with Coast Guard safety regulations
 - 10-year structural hull warranty - transferable
 - NMMA Certified

STANDARD EQUIPMENT

HULL & DECK

Anchor rope locker w/hawse pipe
Anchor roller with cleat
Bow and stern eyes - stainless steel
Cleats (6) 8" stainless steel
Full hull bow flare for dry ride
Gunnel caps - composite with integrated stainless steel side grab-rails
Integrated steps to forward deck - skid resistant
Rod holders (4) - stainless steel w/cap
Rub rail with stainless steel insert **(new)**
Stainless steel rails
Swim platform - integrated
Swim ladder - flip down
Thru hulls - stainless steel **(new)**
Transom full height with door
Windshield - curved tempered Solex® glass

COCKPIT

Beverage holders (5)
Bimini top w/boot - premium canvas with stainless steel hardware **(new)**
Cockpit courtesy lights
Cockpit overboard scuppers
Cooler - 44 qt integrated stbd side with overboard drain
Fishbox - 128 qt. portside with overboard drain
Kodiak Pro Flow baitwell 116 qt. w/light, overboard drain; sealed clear bait lid positive latching cover and stainless gas spring lift
Pedestal seats, adjustable with cushions port/stbd
Skid resistant surfaces
Storage under helm seat 92 qt (dry)
Tackle storage box with removable trays
Transom storage bin

MECHANICAL

Accessory plug - (2) 12V at helm
Baitwell pump - remote mount
Battery parallel with remote switch at helm
Battery switch
Bilge pumps with automatic float switches 500 GPH forward; 1500 GPH aft
Breakers - weather resistant
Compass
Full instrumentation - tachometer, speedometer, fuel, volts, water pressure, trim, systems check*
Horn - flush mount
Hoses - steel reinforced
Ignition - safety interlock system w/lanyard
Navigation lights
Powered buss bar & space at helm for electronics
**Propeller - stainless steel
Remote oil fill (2-stroke)
Steering - tilt hydraulic
Steering wheel - stainless steel w/power knob **(new)**
Submersible rated electrical connections
Switches - sealed
Trim tabs
CABIN
Battery storage with tray(s)
Bi-fold locking entry door
Deck hatch - oversized with screen
Dinette table w/filler cushion and dedicated storage
Galley with sink, storage bin, and pressurized fresh water
Head - self contained, covered
Molded soft touch headliner w/integrated features including overhead rod storage
Portlights - (2) opening w/screen
Rope locker access hatch
V-berth with cushions and storage

*Systems check available with specific engines

**Drop shipped and factory rigged engines only

OPTIONAL EQUIPMENT

Battery switch - dual with 2 trays for single engine; 3 trays for twin engines
 Canada certification
 CE Certification (for Export only)
 Cockpit/cabin carpet - snap in
 Overboard discharge for Vacuflush head only
 Pre-rig for Evinrude, Johnson, Mercury and Yamaha (Recommended HP 225 to 300hp, check for engine availability)
 Raw water wash down
 Steering wheel - aluminum with power knob **(new)**
 Stove - butane (not available for CE boats) **(new)**
 Vacuflush head w/holding tank (10 gal) and dockside pumpout

***Seating Package**

Fold-away rear bench seat with aft bolster
 Port/Stbd cockpit bolsters
 Port/Stbd jump seat cushions with backrest

***Canvas Package for Bimini Top**

Side and drop curtains with windshield connector

***Dive Package**

Dive ladder - heavy duty - removable
 Transom shower fresh water

***Sirius Satellite Radio System**

Clarion AM/FM CD player
 Sirius Satellite Receiver and antenna
 4 speakers
 Digital remote control at helm

***Hardtop Package**

Hardtop - molded, aluminum frame with 2" rigging pipe, electronics box with power for electronics, storage, spreader light, overhead incandescent lights (2), full canvas enclosure and port/stbd windshield wipers

*Note: Items in Packages cannot be ordered individually unless listed as stand-alone.

COLOR OPTIONS

Hullside Color Option Upgrade (new)

Fighting Lady Yellow
 Hunter Green **(new)**
 Midnite Blue

Interior Fabric Selection (new)

Seashore
 Tropical Breeze

ENGINE OPTIONS

Sgl Merc 225 Optimax Saltwater (DIG)
 Sgl Merc 225 FFI Saltwater
 Sgl Merc 250 FFI Saltwater
 Sgl Merc 225 Verado 4-stroke
 Sgl Merc 250 Verado 4-stroke
 Sgl Merc 275 Verado 4-stroke
 Tw Merc 150 FFI Saltwater
 Tw Merc 150 Optimax Saltwater (DIG)
 Sgl Evinrude 225 FFI

Sgl Evinrude 250 FFI
 Tw Johnson 140 4-stroke
 Tw Johnson 150
 Tw Evinrude 150 FFI
 Sgl Yamaha F 225 4-stroke
 Sgl Yamaha Z 250 HPDI
 Sgl Yamaha Z 300 HPDI
 Tw Yamaha F 115 4-stroke
 Tw Yamaha Z 150 HPDI
 Tw Yamaha F 150 4-stroke

PERFORMANCE DATA - Yamaha Z 250 HPDI

Time to Plane	4.16 Seconds
Top Speed	46.8 MPH @ 5400 RPM
Cruise Speed	35 MPH @ 4000 RPM
Cruise Range	404 Miles

Performance and fuel consumption will vary and be affected by water and weather conditions, altitude, load and condition of boat, engine and propeller(s). Cruise range based on 95% of fuel capacity. All data is illustrative and is not warranted. This test done with clean bottom, no bottom paint and light to average load.

Specifications, options, and equipment are subject to change without notice.